



Accessories Catalog &\$\$-



### **Antennas**

#### Maestro item code ACC-A01



#### GSM 900/1800 Magnetic Mount Antenna

Gain: 3 dB

**Magnet Mount** 

RG-174 cable

Connector SMA male type Antenna Lenght: 229 mm

Cable Lenght: 2500 mm

#### Maestro item code ACC-A02



#### L Shape Antenna

Type: Rubber

Material: Copper/ABS

Connector SMA male type

Color: Black Lenght: 25 mm

#### Maestro item code ACC-A03



#### GPS Antenna

Model Fly-GPS

Mounting: magnetic base

RG-174 cable 2m

Working frequency 1575.42 MHz

Connector MMCX

Color: Black



### Antenna's

#### Maestro item code ACC-A04



#### GSM 900/1800 Magnetic Mount Antenna - Cable L= 5000mm

Gain: 0 dB

Magnet Mount

RG-174 cable

Connector SMA male type Antenna Lenght: 229 mm Cable Lenght: 5000 mm

#### Maestro item code ACC-A05



#### GSM 850/1900 Magnetic Mount Antenna - Cable L= 2500mm

Gain: 0 dB


Magnet Mount

RG-174 cable

Connector SMA male type

Antenna Lenght: 229 mm

Cable Lenght: 2500 mm

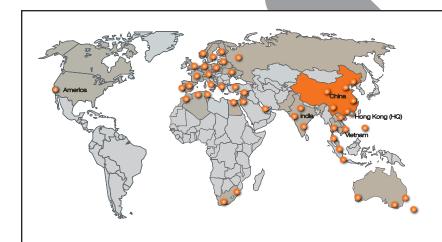

WORLWIDE REACH

**MORE THAN 40 DISTRIBUTORS** 



# **Power Supplies**

#### Maestro item code ACC-PS01



#### Swithching Power Adaptator (Type 1)

Size: L115mm\*W34mm\*H30mm

Voltage Input: AC 100-240V 0.6A 50/60Hz

Voltage Output: DC 12V 1.25A

Standard: UL 60950/CUL/FCC/GS EN60950/EN55022

#### Maestro item code ACC-PS02



#### Swithching Power Adaptator (Type 2)

Size: L69mm\*W46mm\*H30mm

Voltage Input: AC 100-240V 50/60Hz

Voltage Output: DC 12V 1.25A Standard: ETL/GS/CE APPR

#### Maestro item code ACC-PS03



#### Swithching Power Adaptator (Type 3)

Size: L74mm\*W28mm\*H44mm

Voltage Input: AC 100-240Vac 50/60Hz

Voltage Output: DC 12V 0.5A Standard: ETL/GS/CE APPR

EMC: CE/EN55022, FCC PART 15 B



# **Power Supplies**

#### Maestro item code ACC-PS04



#### 15 W Single Output Switching Power Supply NE-15 Series

Size: L79mm\*W51mm\*H28mm

Voltage Input: 85 - 264VAC 120- 370VDC

Voltage Output: DC 12V 1.3A

Standard: UL60950-1, CB(IEC60950-1) Approved

#### Maestro item code ACC-PS05



#### 75 W Single Output Switching Power Supply NE-75 Series


Size: L159mm\*W97mm\*H38mm

Voltage Input: 85 - 264VAC 120- 370VDC

Voltage Output: DC 12V 6.4 A

Standard: UL60950-1, CB (IEC60950-1) Approved

#### Maestro item code ACC-PS06



#### 75 W Single Output Switching Power Supply NE-75 Series

Size: L159mm\*W97mm\*H38mm

Voltage Input: 85 - 264VAC 120- 370VDC

Voltage Output: DC 24V 3.2A

Standard: UL60950-1, CB (IEC60950-1) Approved



# **Power Supplies**

Maestro item code ACC-PS09



Switching Power Adaptor Industrial grade 1.25 A (with NEMA 2 Pins plug cable - USA)

Size: L115mm\*W34mm\*H30mm

Voltage Input: AC 100-240V 0.6A 50/60Hz

Voltage Output: DC 12V 1.25A

Standard: UL 60950/CUL/FCC/GS EN60950/EN55022





## WELCOME-A-BOARD!



Heritage Base Unit (ref:HER010)













## **Cables**

#### Maestro item code ACC-CA01



#### DB 15 RS-232(M) to DB 9 RS-232(F)

SPEC: HDB15PIN/M to DB 9PIN/F L=1100mm

PVC Cable: UL2464\*9C

HDB 15PIN/M: Black Plastic, Shell Nickel Plated DB9PIN/F: Black Plastic, Shell Nickel Plated

#### Maestro item code ACC-CA02



#### DB 15 RS-232(M) to DB 9 RS-232(M)

SPEC: DB 9P/M to HDB15P/M L=370mm

PVC Cable: UL2464

DB 9P/M: Black Plastic, Shell Nickle Plated
DB 15P/M: Black Plastic, Shell Nickle Plated

#### Maestro item code ACC-CA07



#### DB 9 RS-232(M) to DB9(F) RS-232

SPEC: HDB 9P/M to HDB 9P/F L=1000mm

PVC Cable: UL2464

DB 9P/M: Black Plastic, Shell Nickle Plated DB 9P/M: Black Plastic, Shell Nickle Plated



## **Cables**

#### Maestro item code ACC-CA09



DB 9 RS-232(M) to USB 2.0(M) - Cable L=1500mm for Heritage

SPEC: USB to DB9 RS-232 L=1500mm FTDI IC, RS232 male, USB 2.0

#### Maestro item code ACC-CA10



Power Cable with Fuse (Black & Red Wires)

#### Maestro item code ACC-CA13 & ACC-CA15



ACC-CA13 Configuration cable for Heritage Ethernet Add-on



ACC- CA15 I/O extension Cable for Heritage GPS Add-on



# **Din clips**

#### Maestro item code ACC-DIN



#### Din Rail Mount (Maestro 100)

Size: L58mm \* W56.2mm \* H1.2mm

Material: Mild Steel Finishing: Yellow Zinc

No Burrs allowed at all-edges

#### Maestro item code ACC-D02



#### Heritage Din Clip

Size: L35mm \* W77mm \* H6mm

Material: ABS plastic


Quick attach/detach design, instant secure fit, allows vertical or  $90^{\circ}$  rotated position.





### **Others**

#### Maestro item code OTH-001

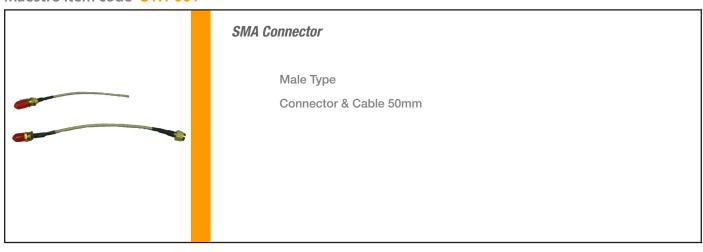

#### Maestro item code OTH-002/OTH-003



#### Maestro item code OTH-004



#### DB15 to DB9 PCB Adaptor (for Maestro100)

Convert Maestro100 DB15 RS-232 port to DB9



### **Others**

#### Maestro item code OTH-005



#### RS232 to RS485 Converter Module With Surge Pression

DB9 Male to RS485 (For Maestro Heritage) Industrial Grade

#### Maestro item code OTH-006/OTH-008



DB 15 RS-232(M) to RS-232 DB9(F) dongle for M100 OTH-006

DB 9 RS232(M) to DB 9(M) External PCB adaptor for Heritage OTH-008

#### Maestro item code OTH-007



#### Heritage Cover

Spare Cover

## Maestro Wireless Solutions Empowering Wireless

#### **GSM/GPRS/EDGE Modem**

Maestro Wireless Solutions designs and offers a comprehensive portfolio of wireless industrial modems for the Machine to Machine (M2M) markets.

#### Maestro Facilities Management Solutions

A range of opened and user-friendly facilities management system for the monitoring, control and data acquisition of unattended facilities.

#### **OEM/ODM Product**

Applying more than 10 years experience and know how of M2M communication, the Maestro team provides effective and highly reliable wireless solutions from off-the-shelf, generic easy to use modems up to specific and optimized OEM integration.

